

### Media: HFC and HCFC refrigerants

Medium: Kältemittel HFCKW und HFKW  
 Médias: HFC et HCFC  
 Aplicaciones: Refrigerantes fluorinados HFC/HCFC  
 Mezzo: HFC e HCFC refrigeranti


Type	Contact system	Ohmic	Inductive FLA	Starting LRA	Voltage
ACB-1UA	SPST-NO	1 A	1 A	6 A	120/240 AC
					250 AC
ACB-1UB	SPST-NC	1 A	1 A	6 A	120/240 AC
					250 AC
ACB-2UA	SPST-NO	8 A	8 A	48 A	120/240 AC
		6 A	6 A	36 A	250 AC
ACB-2UB	SPST-NC	8 A	8 A	48 A	120/240 AC
		6 A	6 A	36 A	250 AC
ACB-4UA	SPST-NO	0.075 A	0.075 A	0.075 A	120/240 AC and 30 DC
					250 AC and 30 DC
ACB-4UB	SPST-NC	0.075 A	0.075 A	0.075 A	120/240 AC and 30 DC
					250 AC and 30 DC
ACB-2UC	SPDT	8 A	8 A	48 A	120/240 AC
		4 A	4 A	24 A	250 AC

### Min/Max Temperature

Min/Max Temperatur  
 Min/Max Température  
 Min/Max Temperatura  
 Min/Max Temperatura

Ambient:  
 Umgebung:  
 Ambiente:  
 Ambiente:  
 Ambiente:

-30 → +85 °C  
 -20 → +185 °F

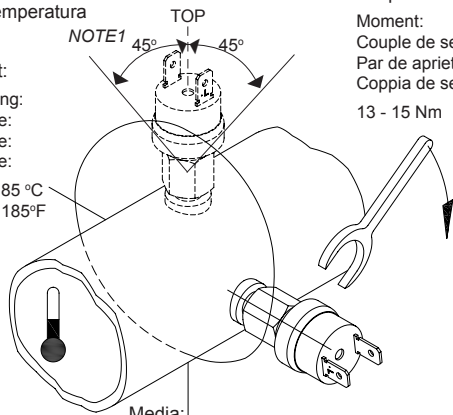


Torque:  
 Moment:  
 Couple de serrage:  
 Par de apriete:  
 Coppia de serraggio:  
 13 - 15 Nm

Media:  
 Medium:  
 Médias:  
 Aplicaciones:  
 Mezzo:  
 -55 → +135°C  
 -70 → +275°F

NOTE1: SPST-NC manual reset type shall be mounted in top ± 45°

### Soldering

Löten  
 Soudage  
 Saldatura  
 Soldadura

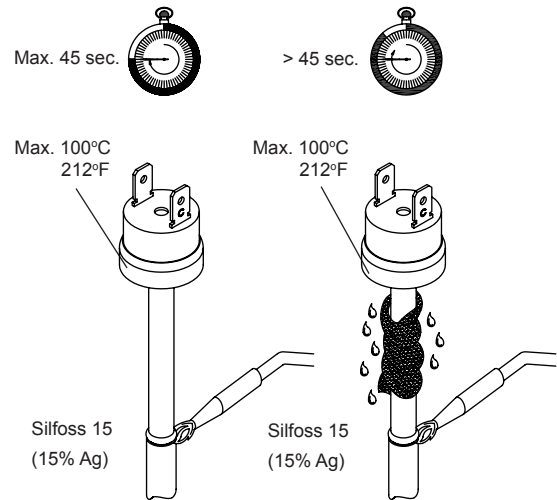

### Contact system

Kontaktsystem  
 Système de contacts  
 Contactos eléctricos  
 Tipo di contatti

